
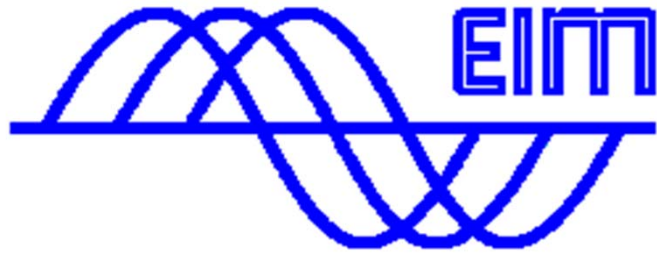


## **2.- Cables de cobre desnudo**

ELECTRONICA INDUSTRIAL MONCLOVA

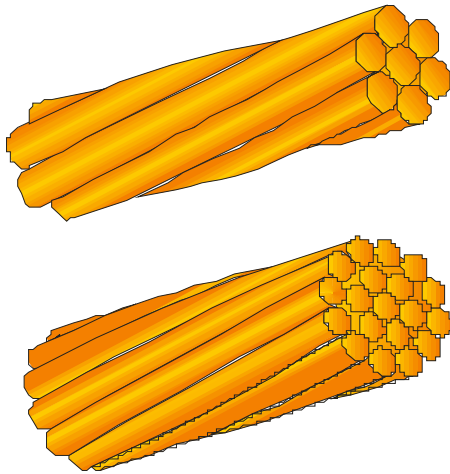

**ELECTRÓNICA INDUSTRIAL  
MONCLOVA, S. DE R.L. DE C.V.**

**CABLES DESNUDOS  
DE COBRE SUAVE**



**CONDUCTORES:** Formados de cobre temple Suave, cableado concéntrico clase B

**NORMAS:** NOM-063-SCFI, NMX-J-012, NMX-J-036

Cables desnudos de cobre suave					
Calibre	Hilos	Diam / Hilo	Diam. Ext.	Area	Peso Cu
AWG / KCM	del Cable	mm	mm	mm <sup>2</sup>	kg / km
20	7	0.31	0.92	0.519	4.70
18	7	0.39	1.16	0.824	7.46
16	7	0.49	1.46	1.31	11.85
14	7	0.62	1.85	2.08	18.88
12	7	0.78	2.33	3.31	29.99
10	7	0.98	2.93	5.26	47.70
8	7	1.23	3.70	8.37	75.87
6	7	1.56	4.67	13.3	120.6
4	7	1.96	5.89	21.2	191.8
2	7	2.47	7.42	33.6	304.9
1	19	1.69	8.44	42.4	384.6
1/0	19	1.89	9.47	53.5	484.9
2/0	19	2.13	10.63	67.4	611.4
3/0	19	2.39	11.94	85	770.9
4/0	19	2.68	13.40	107	972.1
250	37	2.09	14.62	127	1149
300	37	2.29	16.01	152	1378
350	37	2.47	17.29	177	1608
400	37	2.64	18.49	203	1838
500	37	2.95	20.67	253	2298
600	61	2.52	22.67	304	2757
700	61	2.72	24.49	355	3216
750	61	2.82	25.34	380	3446
800	61	2.91	26.18	405	3676
1000	61	3.25	29.27	507	4595

Las dimensiones y pesos son aproximados y estan sujetos a tolerancias normales de manufactura.

LARGOS ESPECIALES A SOLICITUD DEL CLIENTE

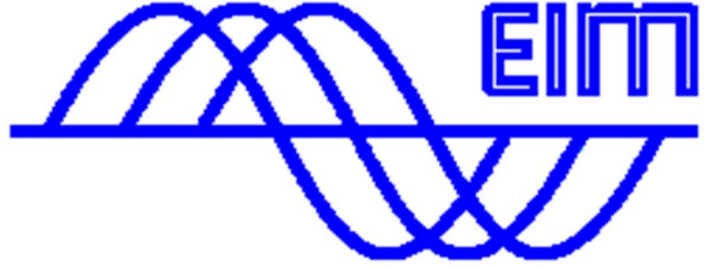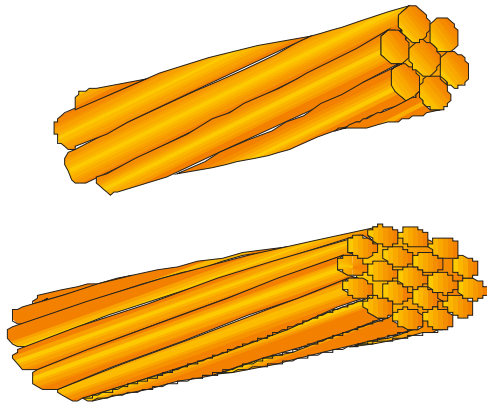

**ELECTRÓNICA INDUSTRIAL  
MONCLOVA, S. DE R.L. DE C.V.**

**CABLES DESNUDOS  
DE COBRE SUAVE**


**CONDUCTORES:** Formados de cobre temple Suave, cableado clase K

**NORMAS:** NOM-063-SCFI, NMX-J-297

Cables desnudos de cobre suave					
Calibre AWG / KCM	Hilos del Cable	Diam / Hilo mm	Diam. Ext. mm	Area mm <sup>2</sup>	Peso Cu kg / km
22	7	0.254	0.79	0.324	2.90
20	10	0.25	0.94	0.517	4.70
18	16	0.254	1.19	0.821	7.46
16	26	0.254	1.52	1.31	11.85
14	41	0.254	1.91	2.08	18.88
12	65	0.254	2.41	3.31	29.99
10	104	0.254	3.04	5.26	47.70

Las dimensiones y pesos son aproximados y estan sujetos a tolerancias normales de manufactura.

LARGOS ESPECIALES A SOLICITUD DEL CLIENTE

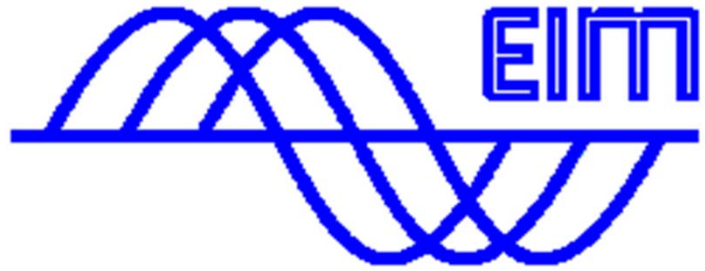

**ELECTRÓNICA INDUSTRIAL  
MONCLOVA, S. DE R.L. DE C.V.**

**CABLES DESNUDOS  
DE COBRE SUAVE**

**CONDUCTORES:** Formados de cobre temple Suave, cableado clase K

**NORMAS:** NOM-063-SCFI, NMX-J-014

Cables desnudos de cobre suave					
Calibre	Hilos	Diam / Hilo	Diam. Ext.	Area	Peso Cu
AWG / KCM	del Cable	mm	mm	mm <sup>2</sup>	kg / km
8	168	0.254	4.12	8.37	75.87
6	266	0.254	5.18	13.3	120.6
4	420	0.254	6.51	21.2	191.8
2	665	0.254	8.19	33.6	304.9
1	836	0.254	9.18	42.4	384.6
1/0	1064	0.254	10.36	53.5	484.9
2/0	1323	0.254	11.55	67.4	611.4
3/0	1666	0.254	12.96	85	770.9
4/0	2107	0.254	14.57	107	972.1
250	2499	0.254	15.87	127	1149
300	2989	0.254	17.36	152	1378
350	3458	0.254	18.67	177	1608
400	3990	0.254	20.06	203	1838
500	5054	0.254	22.57	253	2298
600	5985	0.254	24.56	304	2757
700	6916	0.254	26.40	355	3216
750	7581	0.254	27.64	380	3446
800	7980	0.254	28.36	405	3676
1000	10101	0.254	31.91	507	4595

Las dimensiones y pesos son aproximados y estan sujetos a tolerancias normales de manufactura.

LARGOS ESPECIALES A SOLICITUD DEL CLIENTE